

MZT01N

EXPOSED THERMOSTATIC SHOWER RAIL



meir®


FEATURES

- Refer to the Meir website for warranty terms & conditions, and available finishes
- Flow rate 18 L/min at 3 bar pressure.
- European thermostatic cartridge
- Solid brass construction
- Excludes the hand shower and shower hose with rail.


CARE

- Do not install tapware using any form of acetone silicones.
- Do not apply physical items (such as tools) directly to the product.
- Never use house-hold or commercial detergents, citrus based cleaners, or abrasive cleaners.
- Clean using a mild washing soap solution. Rinse and dry with a soft cloth.
- Check for any product defects before installation.
- Refer to the Installation Manual for correct installation.


SPECIFICATIONS

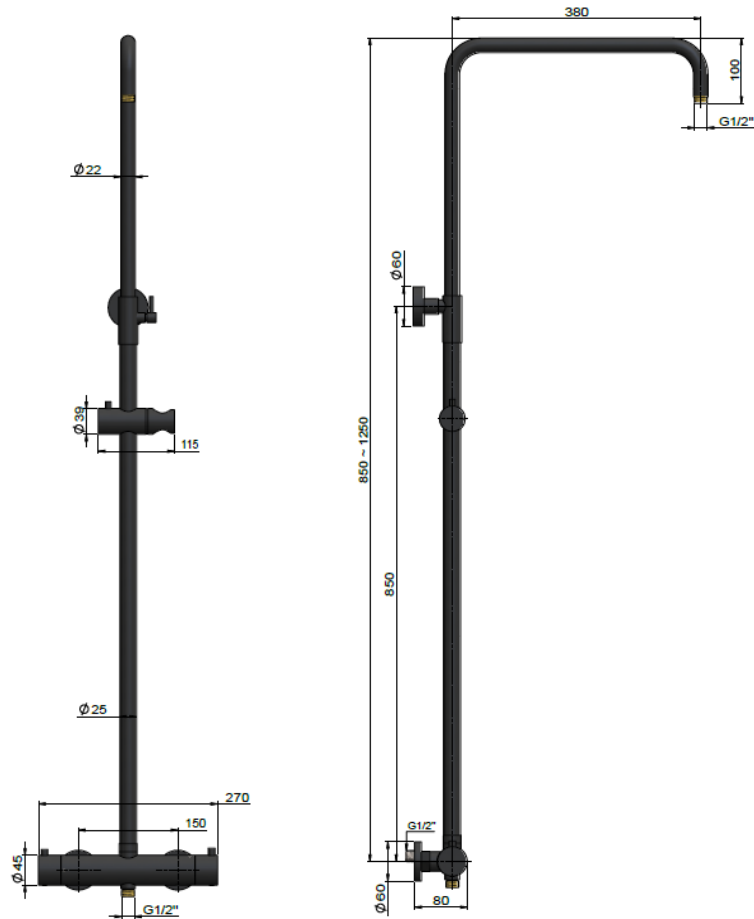

FLOW RATE GRAPH

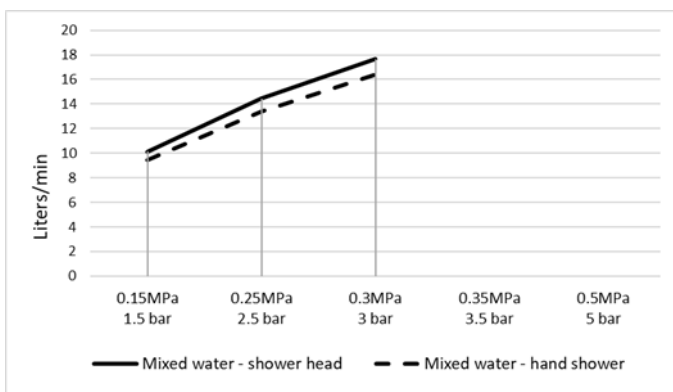

TOLERANCE

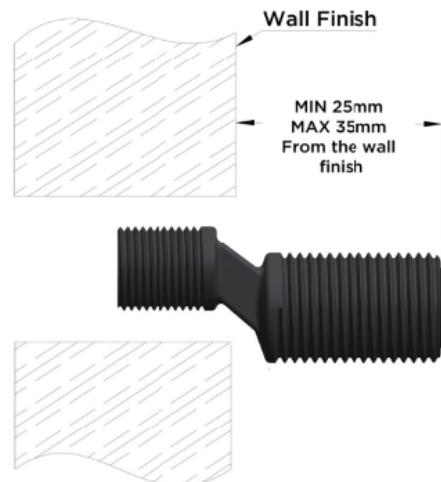


MZT01N

EXPOSED THERMOSTATIC SHOWER RAIL

meir®

EXPLODED VIEW

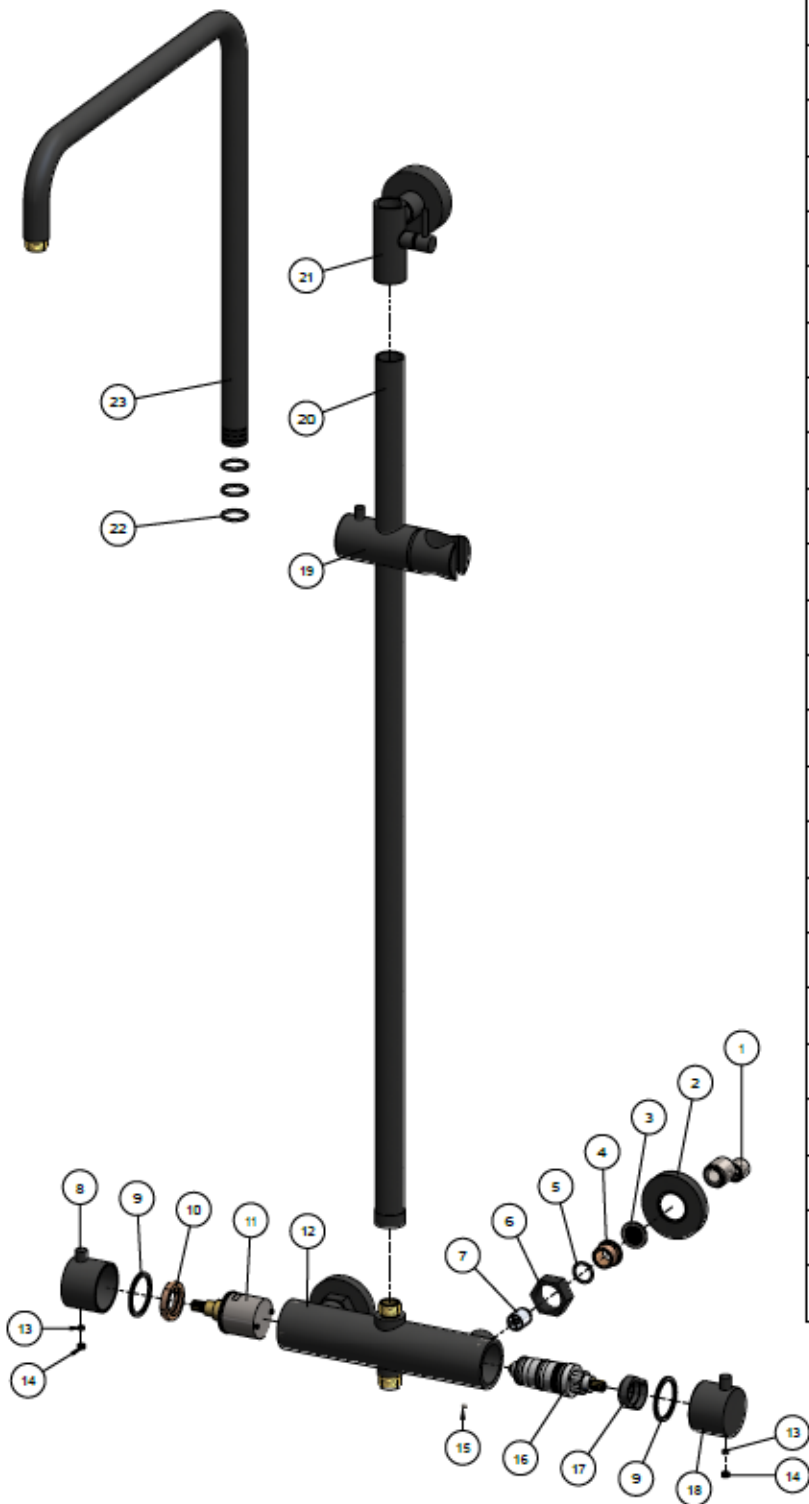

No.	Name Part	Qty
1	Connector	2
2	Cartridge Cover	2
3	Washer & Filter	2
4	Screw	2
5	O-ring	2
6	Lock Nut	2
7	Check Valve	2
8	Diverter Handle	1
9	Wear-Resisting Ring	2
10	Cartridge Nut	1
11	Cartridge	1
12	Body	1
13	Grub Screw	2
14	Rubber	2
15	Grub Screw	1
16	Thermostatic Cartridge	1
17	Limit Collar	1
18	Handle	1
19	Hand Shower Bracket	1
20	Straight Pipe	1
21	Wall Mount	1
22	O-ring	3
23	Overhead Pipe	1

