meir.

MATTE BLACK MS05

CHROME MS05-C CHAMPAGNE MS05-CH TIGER BRONZE MS05-BB BRUSHED NICKEL MS05-PVDBN

AVAILABLE FINISHES



FEATURES


- 10 Year warranty
- Flow rate 25L p/m
- European components and cartridge
- Solid brass construction
- · Box Weight 0.37 kg
- 68mm long 1/2" threaded adapter included

CARE

- Do not install tapware using any form of acetone silicones.
- Do not apply physical items (such as tools) directly to product.
- Never use house-hold or commercial detergents, citrus based cleaners, or abrasive cleaners.
- Clean using a mild washing soap solution rinsed, and dry with a soft cloth.
- Check for any product defects before installation.
- Refer to the installation manual for correct installation.

SPECIFICATIONS 1/2° BSP female thread water inlet TOLERANCE

FLOW RATE GRAPH

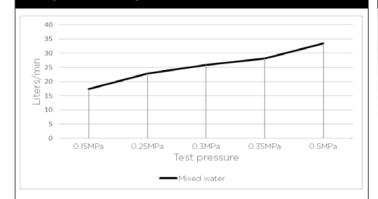

CREDENTIALS

• Watermark AS/NZS3718WMKA25013

EXPLODED VIEW

NO.	Part
1	Back plate
2	O-ring
3	Spout
4	O-ring
5	Aerator
6	Aerator Case

MTV22 & MTVO2 ROUND THERMOSTATIC MIXER 2-way

meir.

MATTE BLACK MTV22

CHROME MTV22-C CHAMPAGNE MTV22-CH TIGER BRONZE MTV22-BB

BRUSHED NICKEL MTV22-PVDBN

AVAILABLE FINISHES

ett II Ire + there


FEATURES

- 10 Year Warranty
- Flow rate 30L p/m at 3 bar.
 Flow rate 17L p/m at 1 bar.
 Recommended for water pressure above 0.5 bar.
- · Box weight 0.95kg
- Vernet thermostatic cartridge
- · Anti-scalding protection
- Temperature over-ride button
- 1-Way Fluhs diverter
- High low-pressure flow rate
- · Solid Brass Construction
- Used together with the MTV02 body part.(2.3kg)

CARE

- Do not install tapware using any form of acetone silicones.
- Do not apply physical items (such as tools)directlytoproduct.
- Never use house-hold or commercial detergents, citrus based cleaners, or abrasive cleaners.
- Clean using a mild washing soap solution rinsed, and dry with a soft cloth.
- Check for any product defects before installation.
- Refer to the installation manual for correct installation.


SPECIFICATIONS 80 7 22 132.9

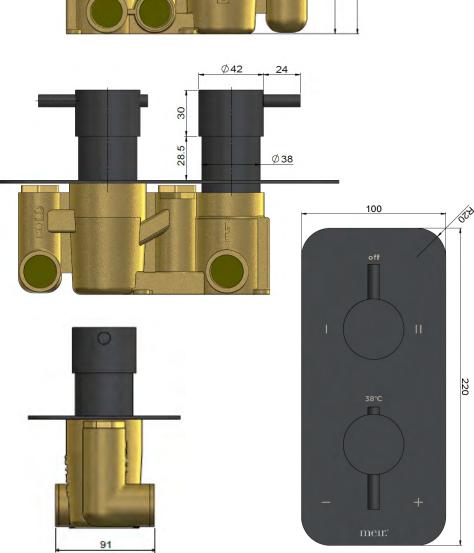

Australian installers to visit the below website before working on the thermostatic mixer valve: https://www.vba.vic.gov.au/plumbing/registrations-licences/thermostatic-mixing-valve


MTV22 ROUND THERMOSTATIC MIXER 2-way

EXPLODED VIEW

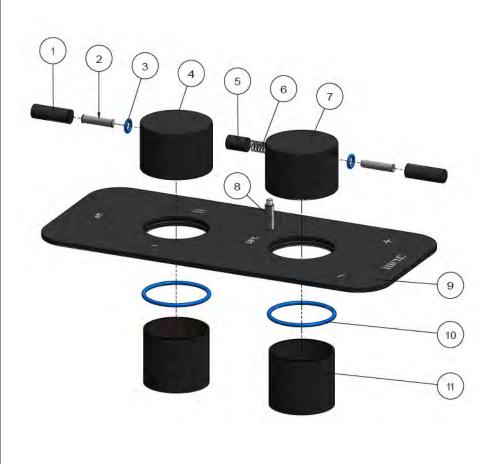


No.	Part Name
1	Pin Lever
2	Screw
3	O-ring
4	Handle
5	Button
6	Spring
7	Handle
8	Positioning Pin
9	Back Plate
10	O-ring
11	Copper Sleeve

FLOW RATE GRAPH



CREDENTIALS

• Applying for WRAS

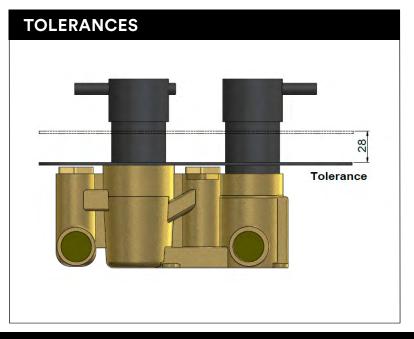

MZ06-R HAND SHOWER

meir.

MATTE BLACK MZ06-R

CHROME MZ06-R-C CHAMPAGNE MZ06-R-CH TIGER BRONZE MZ06-R-BB

AVAILABLE FINISHES

FEATURES


- 10 Year warranty
- Flow rate 6 L p/m
- Solid brass construction
- · Box Weight 1.06 kg


CARE


- Do not install tapware using any form of acetone silicones.
- Do not apply physical items (such as tools) directly to product.
- Never use house-hold or commercial detergents, citrus based cleaners, or abrasive cleaners.
- Clean using a mild washing soap solution rinsed, and dry with a soft cloth.
- Check for any product defects before installation.
- Refer to the installation manual for correct installation.

CREDENTIALS

- Watermark AS/NZS3718WMKA25013
- Wels Rated 3 Star

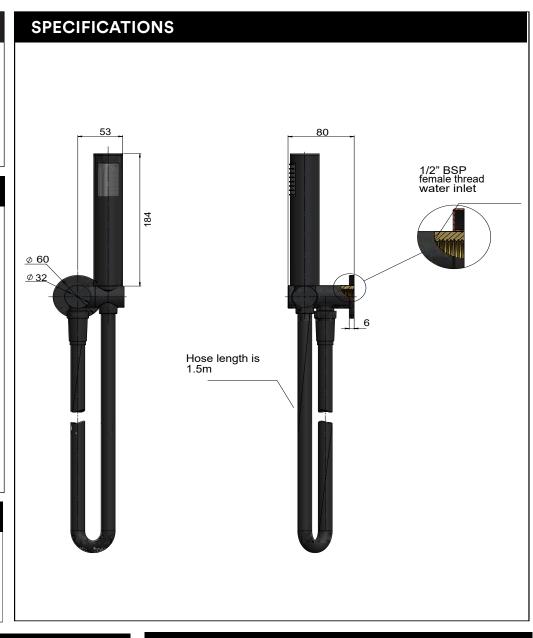


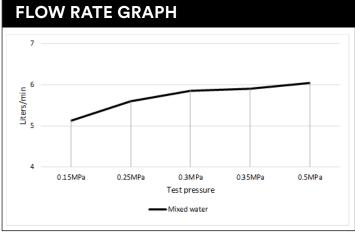

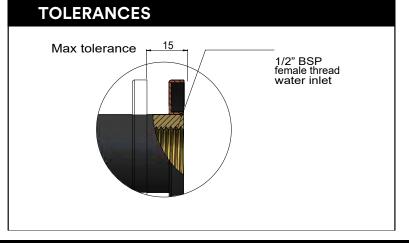

melr.

EXPLODED VIEW

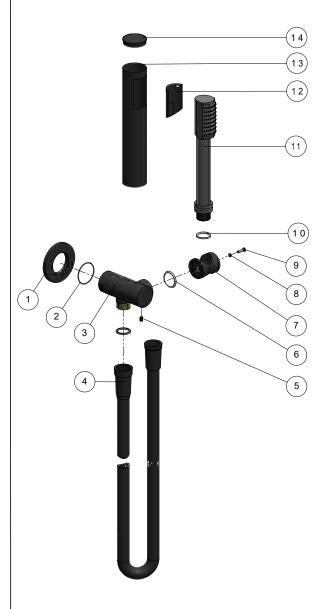

NO.	Part Number
1	Back plate
2	O-ring
3	Bracket
4	Shower hose
5	Screw
6	Wear-resisting ring
7	Shower holder
8	Wear-resisting ring
9	Screw
10	Controller
11	Spray plate
12	Fixed block
13	Body
14	Cover

