

MS05-130

WALL SPOUT

meir®




FEATURES

- Refer to the Meir website for warranty terms & conditions, and available finishes.
- Flow rate 5 L/m & 25 L/m at 3 bar pressure.
- European aerators, basin and bath
- Solid brass construction
- Box Weight 0.37 kg
- 68mm long 1/2" threaded adapter included


CARE

- Do not install tapware using any form of acetone silicones.
- Do not apply physical items (such as tools) directly to product.
- Never use house-hold or commercial detergents, citrus based cleaners, or abrasive cleaners.
- Clean using a mild washing soap solution rinsed, and dry with a soft cloth.
- Check for any product defects before installation.
- Refer to the installation manual for correct installation.

SPECIFICATIONS

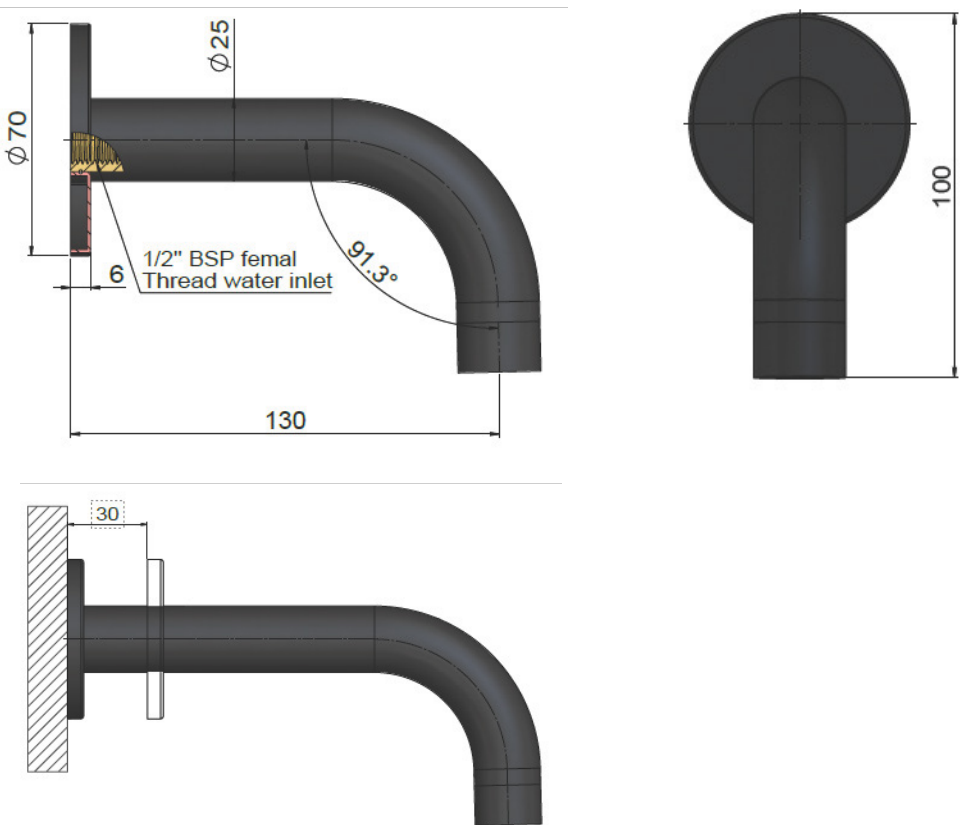


FLOW RATE GRAPH

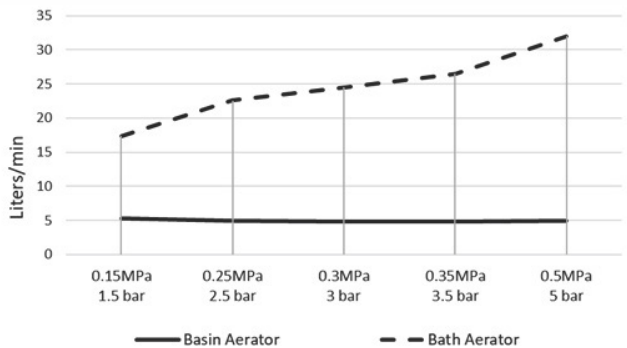

CREDENTIALS

- Watermark AS/NZS3718WMKA25013
- 5-star WELS rated
- 5 litres p/minute
- WELS registration No: T38005

EXPLODED VIEW

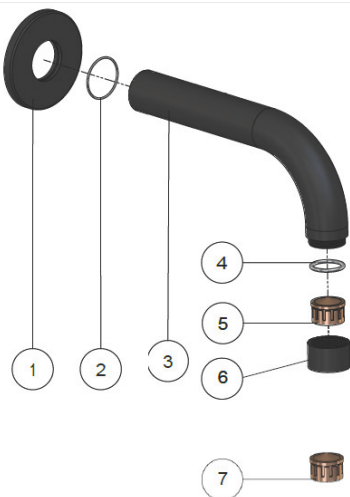

NO.	Part
1	Back plate
2	O-ring
3	Basin Spout
4	O-ring
5	Aerator
6	Aerator Case
7	Bath Aerator

MW03S-FIN

WALL MIXER TRIM KIT

meir®




FEATURES

- Refer to the Meir website for warranty terms & conditions, and available finishes
- European components and cartridge
- Reinforced rubber seal and lining
- Solid brass construction
- Box Weight 1 Kg
- Flow rate 18L p/m at 3 bar pressure.


CARE

- Do not install tapware using any form of acetone silicones.
- Do not apply physical items (such as tools) directly to product.
- Never use house-hold or commercial detergents, citrus based cleaners, or abrasive cleaners.
- Clean using a mild washing soap solution rinsed, and dry with a soft cloth.
- Check for any product defects before installation.
- Refer to the installation manual for correct installation.


SPECIFICATIONS

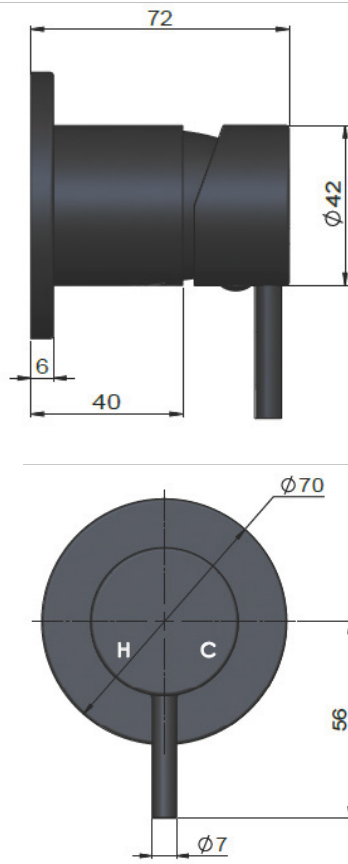

TOLERANCES

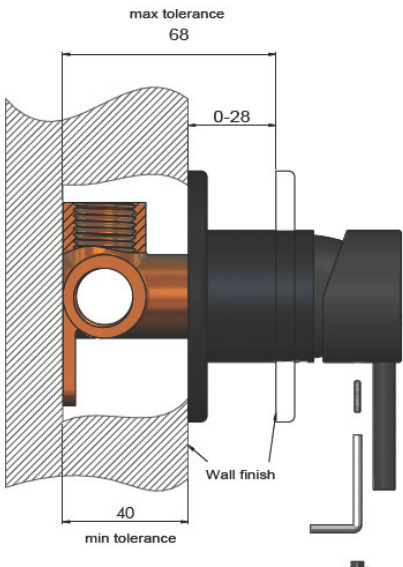


FLOW RATE GRAPH

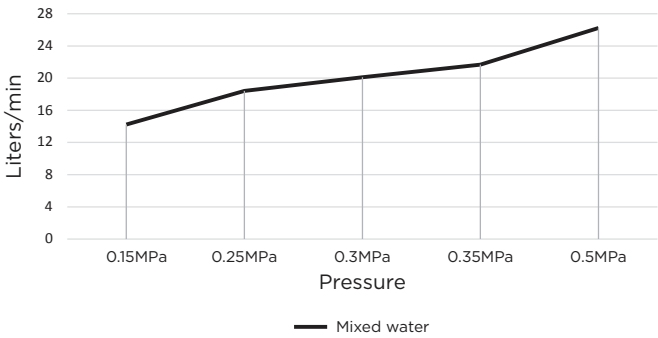

CREDENTIALS

- Watermark AS/NZS 3718WMKA25013


EXPLODED VIEW

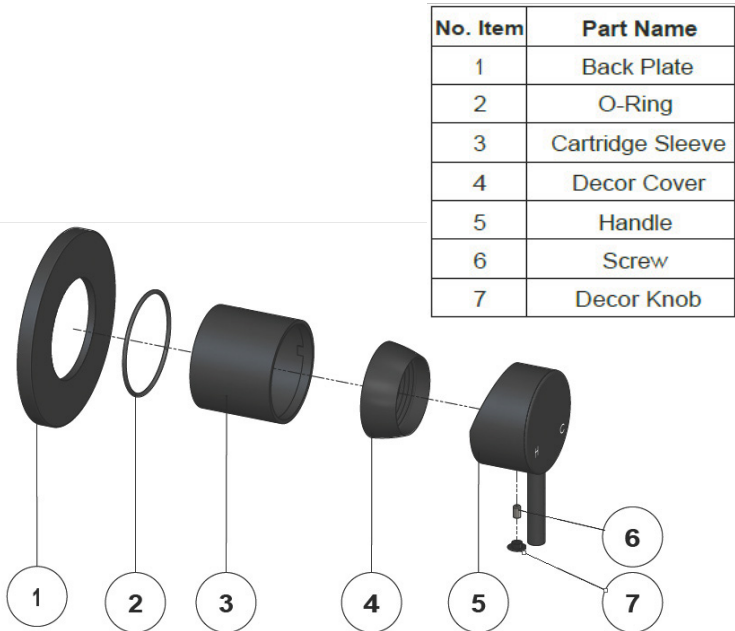

MW13BDY

WALL MIXER CONCEALED BODY

meir®

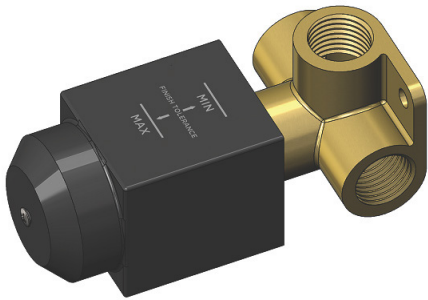


FEATURES

- Refer to the Meir website for warranty terms & conditions, and available finishes
- Flow rate 18L p/m at 3 bar pressure.
- European components and cartridge
- Solid brass construction


CARE

- Do not install tapware using any form of acetone silicones.
- Do not apply physical items (such as tools) directly to product.
- Never use house-hold or commercial detergents, citrus based cleaners, or abrasive cleaners.
- Clean using a mild washing soap solution rinsed, and dry with a soft cloth.
- Check for any product defects before installation.
- Refer to the installation manual for correct installation.


SPECIFICATIONS

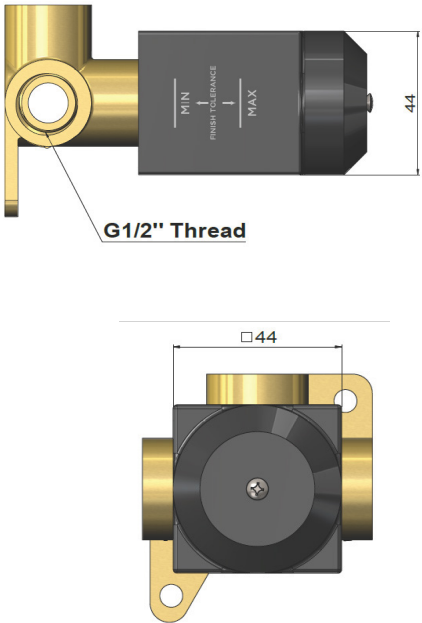

TOLERANCES

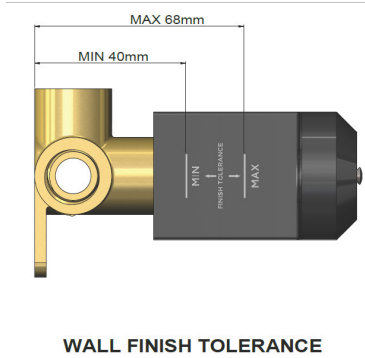


FLOW RATE GRAPH

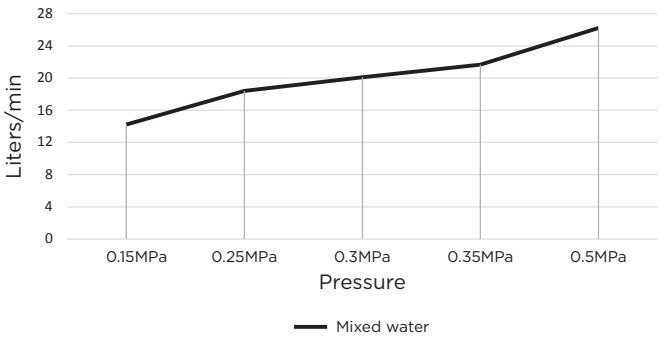

CREDENTIALS


- Watermark AS/NZS 3718WMKA25013

EXPLODED VIEW

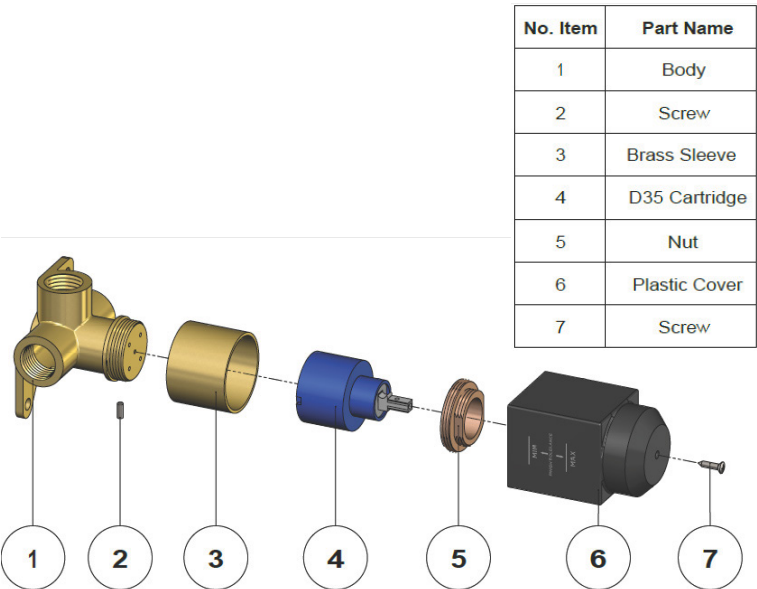

MW15BDY-R/L SPOUT & MIXER CONCEALED BODY

meir®

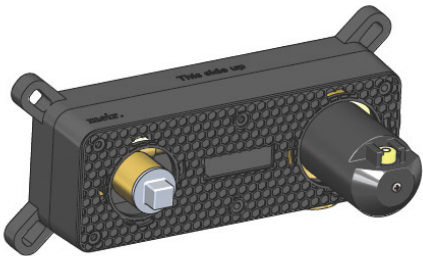


FEATURES

- Refer to the Meir website for warranty terms & conditions, and available finishes.
- Flow rate 18 L/min at 3 bar.
- European ceramic cartridge
- Solid brass construction
- A left-side mixer cartridge is available for a left side installation modification.


CARE

- Do not install tapware using any form of acetone silicones.
- Do not apply physical items (such as tools) directly to the product.
- Never use house-hold or commercial detergents, citrus based cleaners, or abrasive cleaners.
- Clean using a mild washing soap solution. Rinse and dry with a soft cloth.
- Check for any product defects before installation.
- Refer to the Installation Manual for correct installation.

SPECIFICATIONS

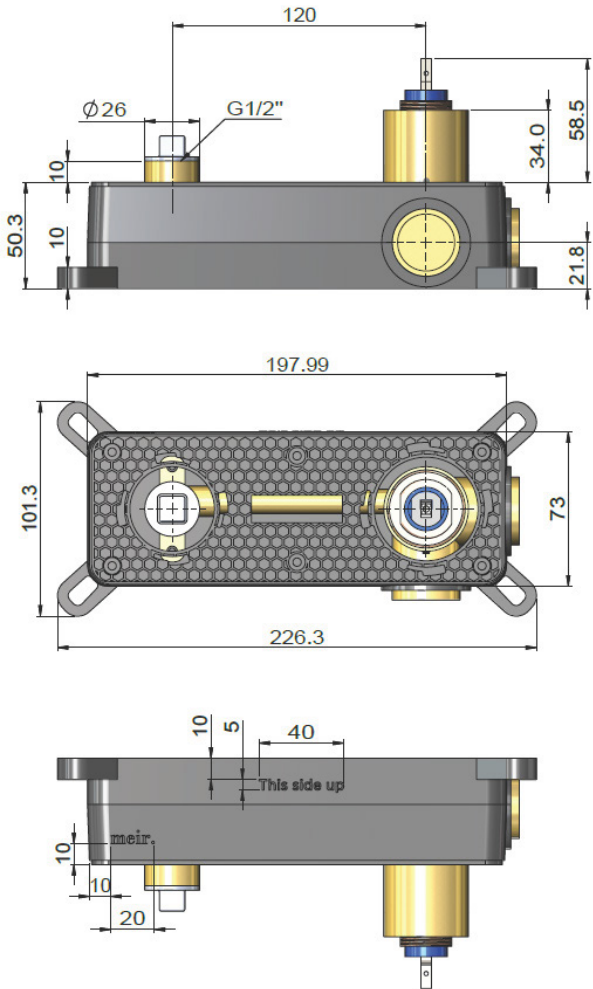

FLOW RATE GRAPH

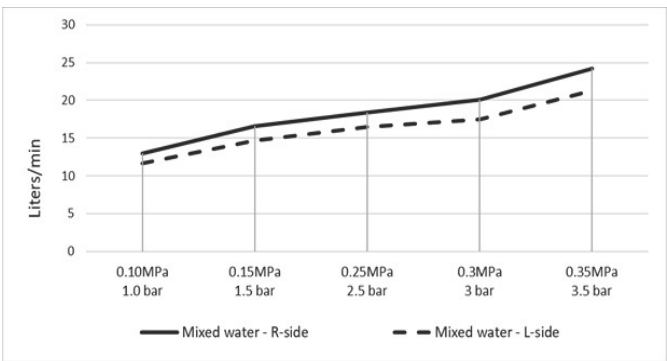

CREDENTIALS

EXPLODED VIEW

